





BOUNDLESS POSSIBILITIES



CONTENTS

Contents of the repair set	5
Scratch repair	6
Hole repair	7
Safety data sheet	11
Tie hole repair	12
Rivet replacement	13

Please Note:

This quick user guide contains the most important information and hints on the repair of alkus* panels. The original manufacturers' operating instructions for the hot air welder, the paint remover and the drill are enclosed in the repair set. Please make sure to read these instructions before starting operation and to observe the specified instructions for safety and use. This wil protect you and avoid damage of the equipment. Only genuine spare parts may be used. When using our products the federal, state and local codes and regulations must be observed.

Sales & Marketing

alkus AG Gewerbeweg 15 9490 Vaduz Liechtenstein

Phone: +423 236 0030 E-Mail: mail@alkus.com

www.alkus.com

Research & Development

alkus GmbH & Co. KG Kunststoffverbundsysteme Im Auchtert 8 72186 Empfingen Germany

Phone: +49 748 598 389910 Fax: +49 748 598 389999 E-Mail: mail@alkus.com

www.alkus.com

Sales & Marketing USA

alkus North America Inc. 400 Oser Avenue, Suit 1650 Hauppauge, NY 11788

USA

Phone: +1 616 490 4174 E-Mail: mail@alkus.com

www.alkus.com

CONTENTS OF THE REPAIR SET





Nr. Description

- 1 Complete alkus® repair set
- 2 alkus® Explorer Case
- 3 Extruder and associated tools
- 4 Quick welding jet
- 5 Paint stripper
- 6 Spare blades for paint stripper
- 7 Drilling machine
- 8 Drill stand
- 9 Picard claw hammer
- 10 Plastic hammer
- 11 Protective gloves H+
- 12 Protective glasses classic
- 13 Special Step drill Ø 35/25

- 14 HM-cylinder head drill Ø 35
- 15 alkus scraper
- 16 Side cutting pliers
- 17 Depth gauge 6 mm
- 18 Welding wire PP, 20 m
- 19 Repair plug 23
- 20 Repair plug 20
- 21 Repair plug 17
- 22 Repair patch Ø 35
- 23 Tool to remove rivets and replacement head
- 24 alkus® AS-conical tube Ø 29/24 L=103 mm
- 25 alkus® Alu-cone Ø 20/22 L=70 mm

SCRATCH REPAIR

Frequent site use inevitably leads to damage to the facing. The alkus® "long-life repair" provides for a repair with identical material and without any loss of quality.

The damaged areas are prepaired for repair by removing soilings and formwork oil residues with a paint scraper.



Protrusions of nail holes and minor soilings can also be removed quickly and easily with the paint scraper.



By use of the extruder (or alternatively hot air welder) the melted polypropylene is applied to the damaged area.



Protruding material is planed with a paint remover \dots






... and a paint scraper.



REPAIR OF HOLES

Holes with a diameter of up to 30 mm can be repaired with a plug. Therefore the hole is drilled out with a step drill. Important: Adjust drilling depth to 6 mm.

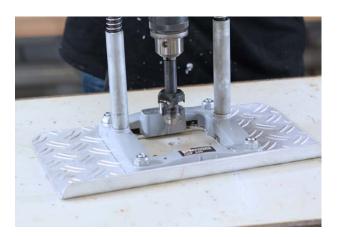





Insert repair plug and ...



... drive it into the hole with a plastic hammer.

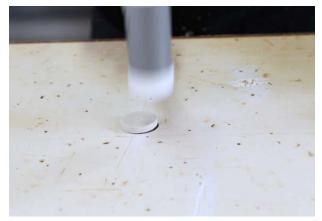

The remaining protrusion is removed easily with a paint remover and paint scraper. The plugs are made of polypropylene, just like the panel itself. Therefore future damage in the area of the plug can also be repaired easily using the extruder.

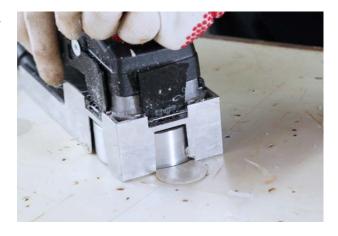

REPAIR PATCH Ø 35



Drill hole at damaged area by using the drill stand and a cylinder head drill \emptyset 35. Check drilling depth (6 mm) with depth gauge.



Insert cylinder head drill bit Ø 35 into drill. Check drilling depth (6 mm) before drilling.



Insert repair patch \emptyset 35 (thickness 6,5 mm) with chamfer faceup.

Important:

Repair patch is protrudes slightly.



Insert repair patch (see page 9) and drive it into the hole with a plastic hammer.



Weld by using extruder (alternatively hot air welder).



Plane surface at damaged area by using the paint remover.



If required, use the paint scraper to achieve a smooth surface.



SAFETY DATA SHEET



Special step driller, diameter 35/25 mm with setscrew for drilling depth



HM cylinder head drill bit, diameter 35 mm setscrew for drilling depth



Following safety information obtain for the items listed above:

- Use safety glasses when working with these tools.
- A hex screwdriver 3 mm is needed to adjust the drilling depth.
- Ensure the drill piece is centralised in the chuck.
- When fixing the drill piece, ensure the chuck is fully tightened.
- The tool should be used with max. 2500 rotations per minute and with max. 1.2 m/min. feed motion.

Repair plug 17 (for alkus® solid plastic panel AL12,9 – AL17)

Repair plug 20 (for alkus* solid plastic panel AL18 – AL20)

Repair plug 23 (for alkus* solid plastic panel AL21 – AL27)

Repair patch, diameter 35 mm

Repair patch, diameter 51 mm



TIE HOLE REPAIR

As the core and surface of the panel are the same material, tie hole damage can be repaired successfully using identical welding material.



The aluminium repair cone is inserted into the tie hole as a shaper ...



...and afterwards the damaged area is filled by using the extruder (alternatively hot air welder).



After the repair cone is removed, the repaired area is smoothened with a paint remover and paint scraper.





The result: a fully operative tie hole!



REPLACEMENT OF RIVETS

Punch rivets

Remove damaged rivet head (drill out).

Drive rivet with tool to remove rivets into the frame ...





... then remove rivet by using a hammer.



Insert new rivet and fix it by using a pneuamtic or electric rivet gun.

Important:

Observe rivet length:


Rivet 5x20 for alkus solid plastic panels 6-10 mm thickness Rivet 5x25 for alkus solid plastic panels 11,5-17 mm thickness Rivet 5x33 for alkus solid plastic panels 18-23 mm thickness





NOTES

REMEMBER EVERYTHING

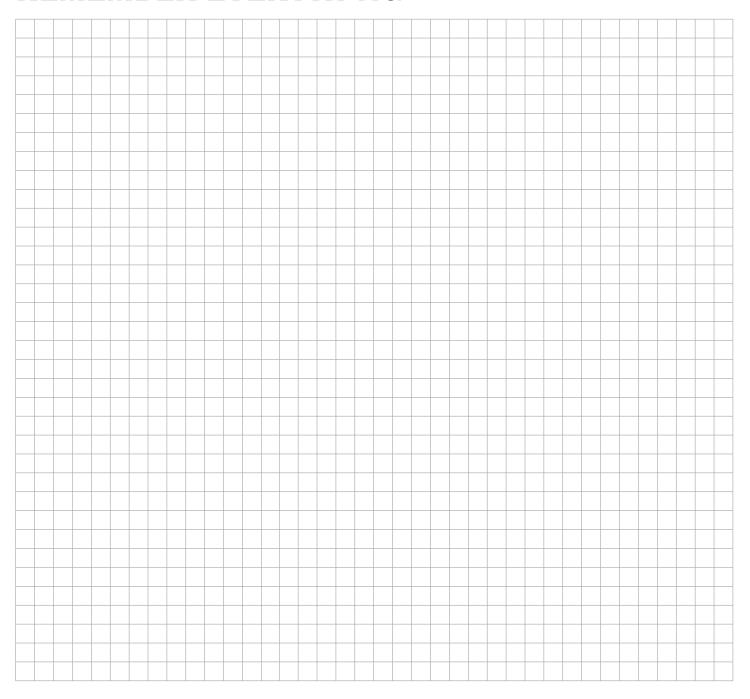



Sales & Marketing

alkus AG Gewerbeweg 15 9490 Vaduz Liechtenstein

Phone: +423 236 0030 E-Mail: mail@alkus.com

www.alkus.com

Research & Development

alkus GmbH & Co. KG Kunststoffverbundsysteme Im Auchtert 8 72186 Empfingen Germany

Phone: +49 748 598 389910 Fax: +49 748 598 389999

E-Mail: mail@alkus.com

www.alkus.com

Sales & Marketing USA

alkus North America Inc. 400 Oser Avenue, Suit 1650 Hauppauge, NY 11788 USA

Phone: +1 616 490 4174 E-Mail: mail@alkus.com

www.alkus.com